



● 用途 Applications


排泥阀又名盖阀。广泛应用于给水排水处理工程各类沉淀池及沉砂池中用于排放池底的沉淀物，一般与启闭机配套使用。

Mud valve, or cap valve is widely used in various setting tank for water and sewage engineering to dispose the sediments on the tank bottom. Generally, it is applied matched with start-stop devices.


● 特点 Features

1. 阀盖自带螺杆，水深较浅时可直接用手柄操作。
 2. 阀板成锥拱形，自带导向，开启操作力小。
 3. 螺杆及密封面采用锡青铜，耐腐，耐磨。
 4. 选用电动启闭装置，可进行远程控制。
1. Bonnet with screw stem. It can be directly operated by hand shank under shallow water.
 2. Board is conical arching; self-oriented; operating force is slight.
 3. Screw stem and sealing face adopt tin bronze. Corrosion and wear resistant.
 4. Automatically start and stop, telecontrol maybe.

● 型号示例 Type and Its Indication

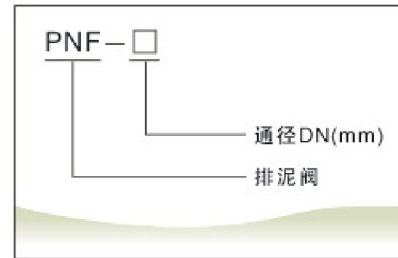

● 总体布置 General Layout

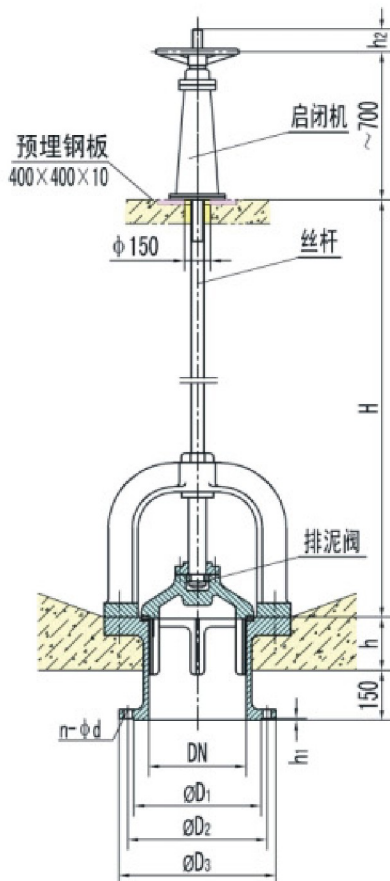

● 订货说明 Requirements for Order

1. H由用户自定，订货时应注明，不注明按3m供货。
 2. 本公司排泥阀均配手轮启闭机。如需配电动启闭机请注明。
 3. 图中h及法兰部位尺寸，可根据用户需要供货。
 4. 如需订购平底盖阀、提拔阀请注明。
1. H is decided by users, note when orders. Supply 3m without notice.
 2. Each mud valve goes with hand operated open and close machine. Please make specific order for motor operated ones.
 3. The value of "h" and size of flange parts are supplied according to user's demand.
 4. If you want to order the flat-bottomed valves, the lifting valves or other valves, please make specific order.

● 尺寸参数 Size Parameters

(mm)

尺寸 \ 口径 DN	Φ150	Φ200	Φ300	Φ400	Φ500
D1	200	255	362	462	568
D2	225	280	395	495	600
D3	260	315	435	535	640
h	200	300	300	450	450
h1	3	3	4	4	4
h2	200	250	350	450	550
n-Φd	8-Φ18	8-Φ18	12-Φ23	16-Φ23	16-Φ23